

Fitter friendly

For the convenience of the installer, Steadmans Paramount doors are supplied with an installation kit which includes bolts and drill bits to fix the frame to either concrete or steel.



Each door comes with:

- A: 6 x concrete fixing bolts
- B: 6 x steel fixing bolts
- C: 1 x spanner with 2 x heads
- D: 6 x jacking bolts
- E: 6 x keys (plus 2 x fitter's keys)
- F: 1 x concrete drill bit
- G: 1 x steel drill bit
- H: 1 x allen key
- I: 1 x handle fascia
- J: 6 x sealing caps

Sign of Quality

A. Steadman & Son

England & Wales

Warnell, Welton
Carlisle
Cumbria CA5 7HH

Tel: 01697 478 277

Fax: 01697 478 530

Scotland

New Edinburgh Road
View Park
Uddingston G71 6LL

Tel: 01506 437 753

Fax: 01506 440 716

E-mail: info@steadmans.co.uk

Online: www.steadmans.co.uk

Northern Ireland & Ireland

Unit 5, Scarva Road Ind. Est.
Banbridge, Co. Down
Northern Ireland BT32 3QD

Tel: 02840 660 516

Fax: 02840 660 517

Scotland

Mill of Crichtie
Fyvie, Turriff
Aberdeenshire AB53 8QL

Tel: 01651 891 668

Fax: 01651 891 698

www.steadmans.co.uk

Steadmans

CI/SfB

(31.5) h2

October 2012

Ten point locking STEEL DOOR

Manufacturers of Cladding Products for the Construction Industry
PARAMOUNT STEEL DOORS

Paramount steel doors

For more information on the complete range of Steadmans Paramount doors contact Steadmans on

01697 478 277.

Also available:


Fire-rated emergency escape steel door



Clearly secure

The ten point locking system

It's the combination of a ten point locking system and interlocking anti-jemmy studs, which ensures forced entry is difficult. Six of the locking points are connected to steel bars which are linked to and through the master lock mechanism.

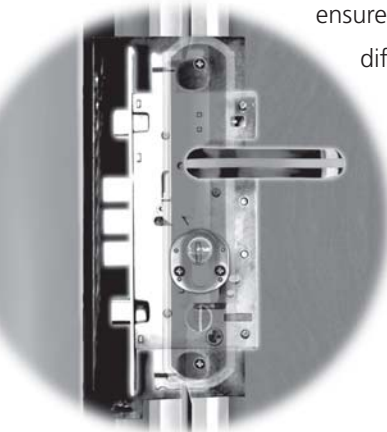

The master lock itself has four substantial locking points (shown on this x-ray image).

Extra security

There are a total of eight keys provided, six are sealed and for the customer's exclusive use - the other two are used by the installers. Once the door is installed, the customer's keys will immediately change the combination of the lock, so preventing any further use of the two installer's keys. This adds a further level of security.



Construction

The x-ray images in this leaflet show all the security points, as well as the important internal security steel bar reinforcements. To prevent the door from sagging, four heavy duty hinges are fitted as standard.



Wheelchair access

The threshold is stainless steel and complies with local authority directives for wheelchair users.

Insulation

The doors are insulated with glass wool in accordance with British Standards directives BS EN 1634-1:2000.

Anti-jemmy studs

Anti-jemmy studs are fitted to the frame and the door. These studs protrude and interlock when the door is closed. Anti-jemmy studs and all fittings are stainless steel.

